



## TECHNICAL SHEET FOR SUNSET COLLECTION ENGINEERED FLOORING

### **CHARACTERISTICS**

ABC quality grade rotary cutting sheet metal  
Measurements: 8/1.8mm and 10/1.8mm

### **MEASUREMENTS**

\*8/1.8mm x 137mm x LV 1.19mts

\*10/1.8mm x 187mm x LV 1.19m


Variable length (LV) from 40cm to 1m 30% (70% pieces of 1.06 – 1.19m)

### **AVAILABLE FINISHES**

\*Semi-Matt Aluminum Oxide (Bona UV Coating System)

\*Unfinished

### **STRUCTURAL REINFORCEMENT**

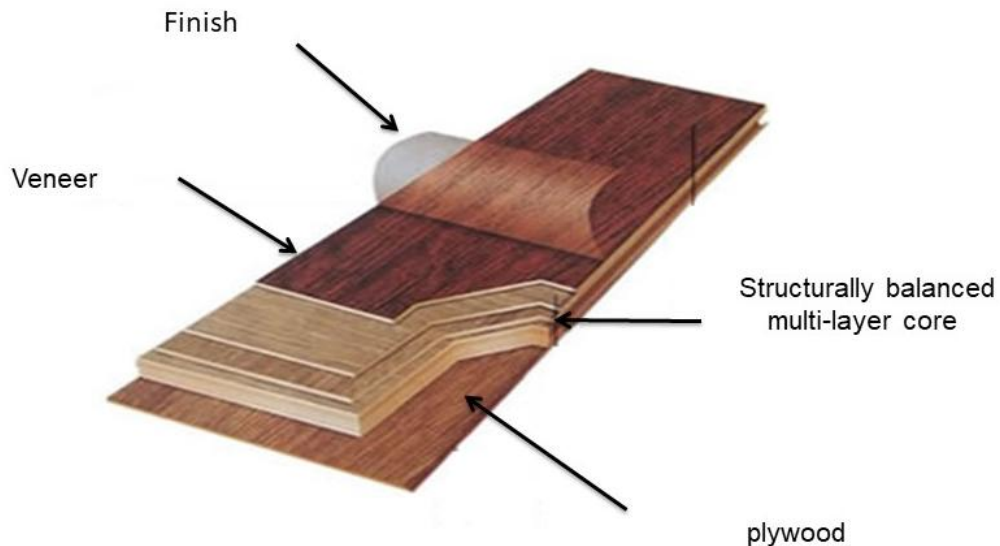



## TECHNICAL DATA

- 4-sided tongue and groove and micro-bevel.
- Epoxy patch in knots and cracks.
- For the core, tropical wood veneers from plantations in southeastern Mexico are used, which are arranged in a specific way to achieve structural balance. Maple or birch plywood is used.
- All veneers comprising the structure of the stave are hot pressed with urea resin.
- The staves are subjected to quality tests against delamination due to manufacturing defects.
- Manufactured with Mexican labor.



## HEALING KNOTS AND CRACKS IN ROTARY CUT SHEET METAL

The ABC grade quality of our staves presents a variety of live and healed knots. A maximum of 2 healed dead knots per piece are allowed, which do not exceed 5 cm, or 3 healed dead knots per piece, which do not exceed 3 cm in diameter. The healed fissures have a maximum width of 8 mm and a maximum length of 30 cm. The healing is done with camel-coloured epoxy resin.

## \*IMPORTANT

Wood, being a natural product, has variations in tone and distinctive grains with different shapes and sizes. These changes in tone are accentuated over time due to the oxidation process and exposure to light radiation.

The range of colors available in this line is subject to change due to degradation or discoloration that can range from mild to medium, as a result of direct or partial exposure to UV rays. (Please review the installation, maintenance and warranty manual for engineered flooring for more details and recommendations on this particular point).

When you receive your flooring, make sure that your product corresponds to the type, quality, size and finish requested. If any of these characteristics do not correspond, immediately inform your sales agent so that the material can be exchanged. **Once the product has been installed or manipulated, NO CHANGES OR CLAIMS ARE ALLOWED.**

For warranty purposes and proper installation as well as proper care of our engineered flooring, we ask you to please review the installation, maintenance and warranty manual for engineered flooring available on our website. [www.pathrosfabricapisosdemadera.com/en](http://www.pathrosfabricapisosdemadera.com/en)