



TECHNICAL DATA SHEET ENGINEERED FLOORING SAW CUT

WOOD

- American White Oak
- American Walnut
- Mayan Walnut

SHEET METAL CHARACTERISTICS

ABC and FAS quality grade (FAS quality only available for White Oak in size 13/2 x 187mm)
Measurements: 2mm and 4mm of visible sheet metal

MEASUREMENTS

13/2MM X 187MM X LV 2.35 meters

16.5/4MM X 187MM X LV 2.35 meters


16.5/4MM X 229MM X LV 2.35 mts (Subject to availability, only applies to the White Oak species)

Variable length (VL) pieces from 40 cm to 1.5 mt. 60-70% and (30%-40% pieces from 1.8 - 2.35 mts)

AVAILABLE FINISHES

- *Extra Matt Aluminium Oxide (Bona UV Coating System)
- * Super Ligth Brushed with Rubio Monocoat color
- *Ligth brused with Rubio Monocoat color
- *Unfinished

STRUCTURAL REINFORCEMENT

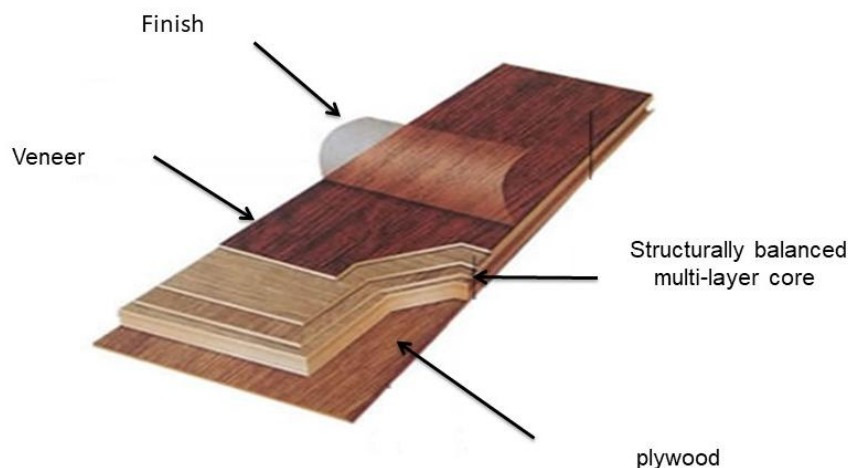



TECHNICAL DATA

- 4-sided tongue and groove and micro-bevel.
- Epoxy patch in knots and cracks.
- The core and plywood are made from tropical wood veneers from plantations in southeastern Mexico, which are arranged in a specific way to achieve structural balance.
- Cold pressed visible sheet metal with PVA adhesive.
- The staves are subjected to quality tests against delamination due to manufacturing defects.
- TSCA VI and CARB II certifications (Low formaldehyde emissions).
- Manufactured with Mexican labor.

HEALING KNOTS AND CRACKS IN SAW CUT SHEET METAL

The ABC grade quality of our staves presents a variety of live and repaired knots per piece, which do not exceed 1.5" in diameter. The repaired fissures have a maximum width of 10mm and a maximum length of 45cm. The repair is done with epoxy resin in reddish brown colors for walnut wood, black color for Tzalam and White Oak wood in size of 13/2mm and in camel color for White Oak wood in size of 16.5/4 x 187mm.

FAS grade quality in White Oak wood, measuring 13/2 x 187mm; there are few live and healed knots per piece, which do not exceed 1" in diameter. The healed cracks are a maximum of 8mm wide and a maximum length of 25cm, the healing is done with black epoxy resin.

***IMPORTANT**

Wood, being a natural product, has variations in tone and distinctive grains with different shapes and sizes. These changes in tone are accentuated over time due to the oxidation process and exposure to light radiation.

In the case of materials finished with color, whether extra matte aluminum oxide varnish or Rubio Monocoat oil, they are subject to change, due to degradation or discoloration that can range from mild to medium, as a result of direct or partial exposure to UV rays. (Please review the installation, maintenance and warranty manual for engineered flooring for more details and recommendations on this particular point).

When you receive your flooring, make sure that your product corresponds to the type, quality, size and finish requested. If any of these characteristics do not correspond, immediately inform your sales agent so that the material can be exchanged. **Once the product has been installed or manipulated, NO CHANGES OR CLAIMS ARE ALLOWED.**

For warranty purposes and proper installation as well as proper care of our engineered flooring, we ask you to please review the installation, maintenance and warranty manual for engineered flooring available on our website. www.pathrosfabricapisosdemadera.com/en